



Side of Pole/Wall Mount Bracket (For use with Solarland SLP085 – SLP135 Panels) SLB -0114

The Solarland® SLB-0114 has been specifically designed to be used with the Solarland® SLP Series panels ranging in size from 85W – 135W. This simple fixed bracket provides a safe and secure mount to a pole, wall or fence.

Specifications

Mounting Type	Side of Pole/Wall Mount
Module Type	Specifically designed to work with Solarland SLP series panels, but can be adapted for use with other panels
Number of Modules	Mounts 1 Panel
Setting Angle	0°~90°
Wind Load	Designed to withstand wind speeds of 90mph
Snow Loading	1.1kN/m ²
Warranty	5 Years

Kit Components & Parts


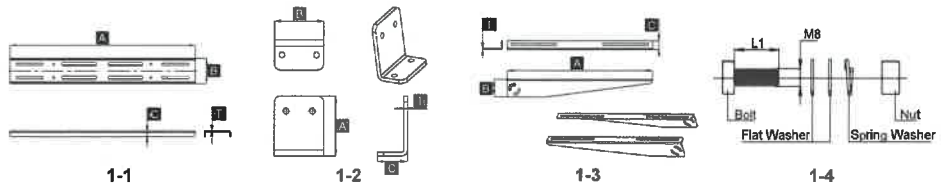


Diagram	Component	Material	Surface Treatment	Quantity	Dimensions
1-1	Fixed Bracket	5052Al	N/A	1	A=800mm[31.50in.], B=110mm[4.33in.] C=25mm[0.98in.], T=5.0mm[0.20in.]
1-2	Fixed Bracket	5052Al	N/A	2	A=100mm[3.94in.], B=83mm[3.27in.] C=50mm[1.97in.], T=6.0mm[0.24in.]
1-3	Tilt Arm	5052Al	N/A	2	A=675mm[26.57in.], B=82mm[3.23in.] C=50mm[1.97in.], T=3mm[0.12in.]
1-4	Module Bolt	AISI304	N/A	4	M8X25[0.98in.]
1-4	Mounting Bolt	AISI304	N/A	8	M8X25[0.98in.]

*Note: U-Bolts or Steel Clamps are not supplied in this kit and must be procured separately if pole mount is required

Mounting Diagram

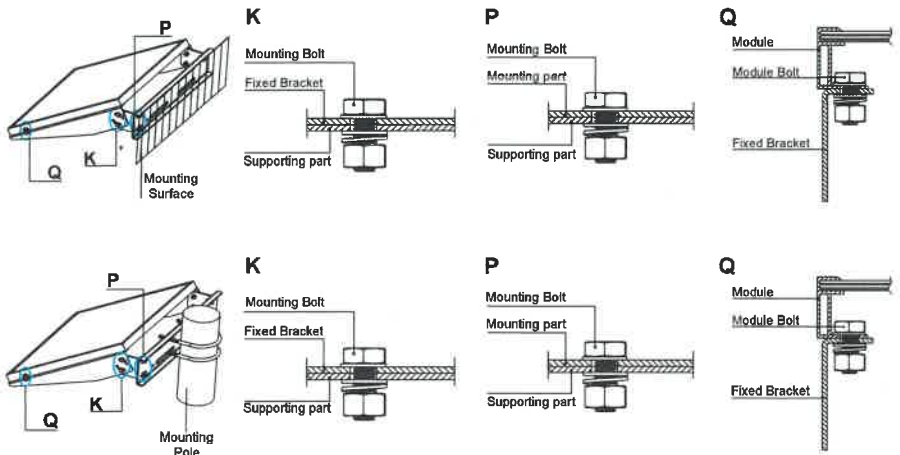

Note:

- When using this kit with another brand of panel you may need to change the module bolts (1-4) to suit the mounting holes on the panel. Here we offer M8 & M6 bolt for customers choice.

Side of Pole/Wall Mount Bracket (For use with Solarland SLP085 – SLP135 Panels)

SLB -0114

admin@dynamax.com
www.dynamax.com

